



SM5X0 SERIES

ASETEK 92 mm AIO MOUNT ASSEMBLY GUIDE

ASSEMBLE THE AIO

Pictured below is the recommended fan mounting and tube configuration for the ASETEK 92mm AIO for our SM5X0 series cases.



Note the orientation of the tubes, fan and fan wire.



NOTE: Sliger does **NOT** include the crews for attaching the fan to the radiator. We recommend 4x .750" long 6-32 Phillips #2 flat head screws.

REAR FAN


Your secondary fan (or 4x SSD / 3.5" HDD bracket) must be positioned before installing the AIO. **DO NOT SCREW IT INTO POSITION YET.**

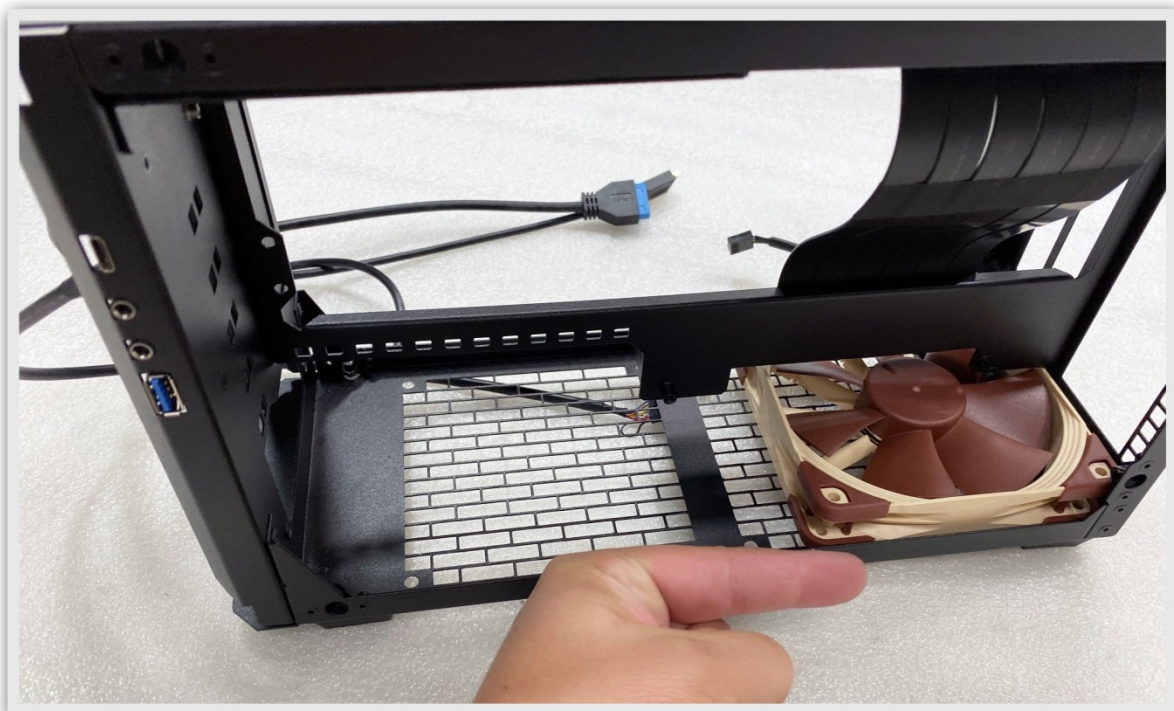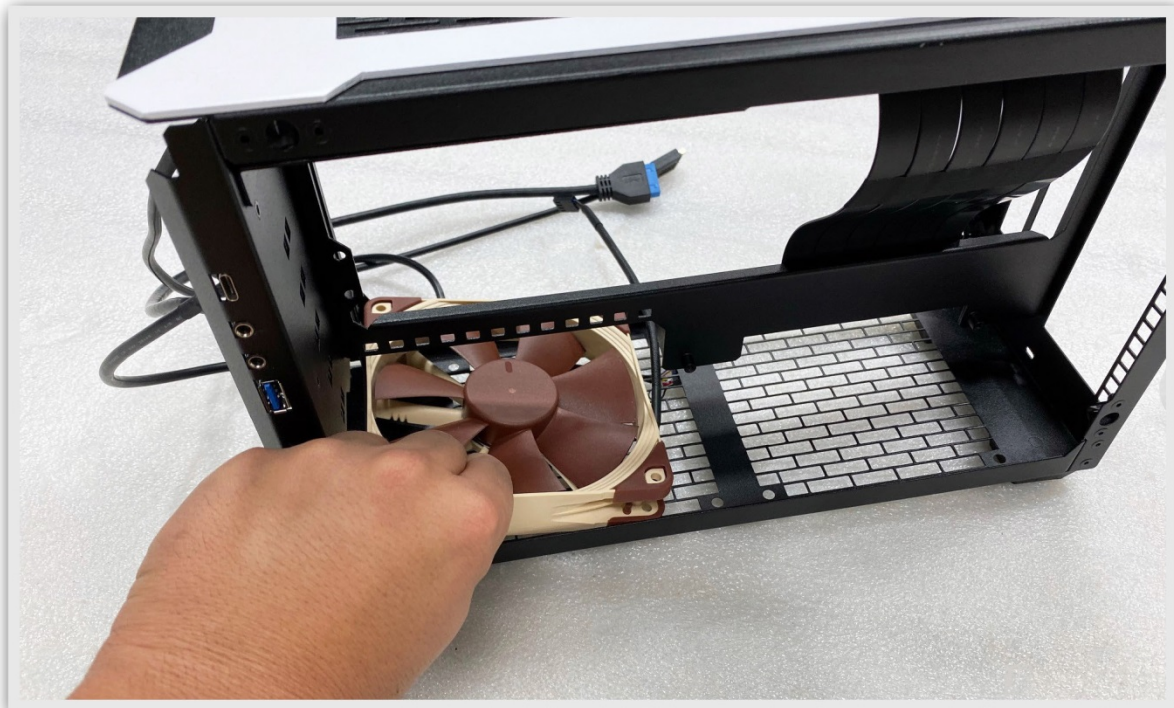

AIO BRACKET


Attach the AIO bracket to the radiator so the hoses are towards the GPU side of the case, and the two mount hardware holes are towards the rear of the case.

NOTE: the 4x screws used for bottom of AIO are 1/4" 6-32 PFH #2 black.

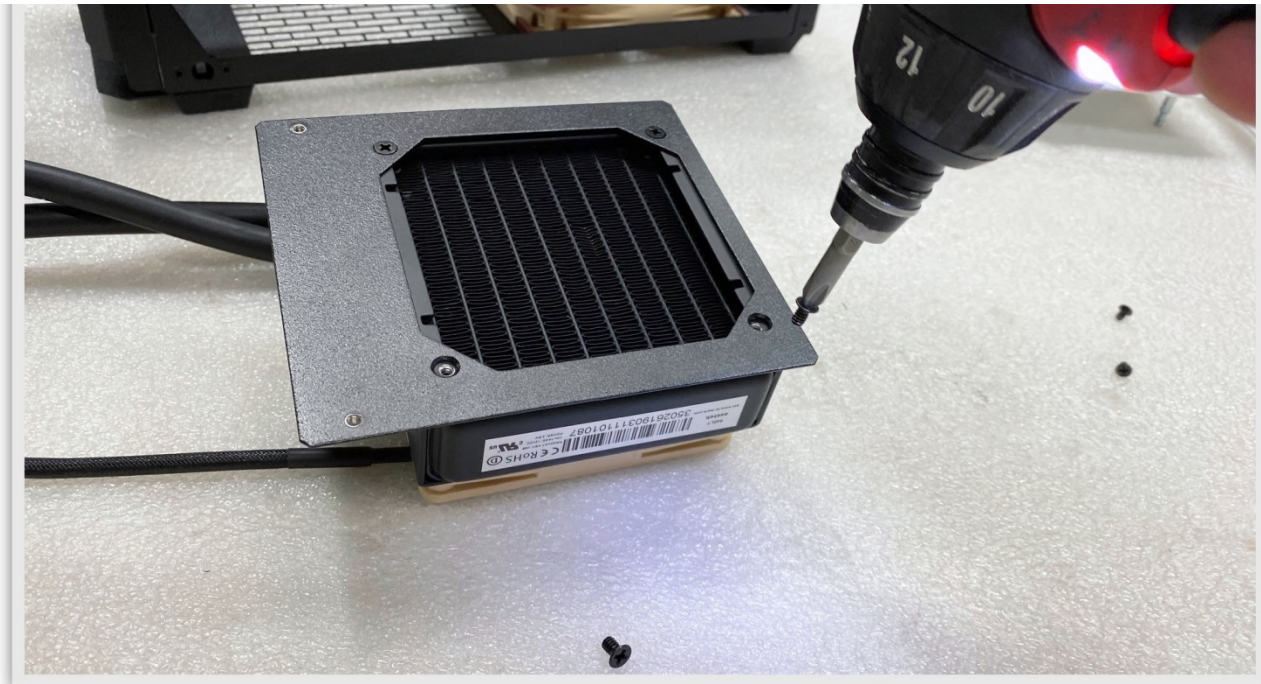



INSERT ASSEMBLY

From the motherboard side insert the assembly at an approximate 45 degree angle to tuck radiator right angle hose connectors under the center spine. The rest of the assembly should then be able to slide straight in.

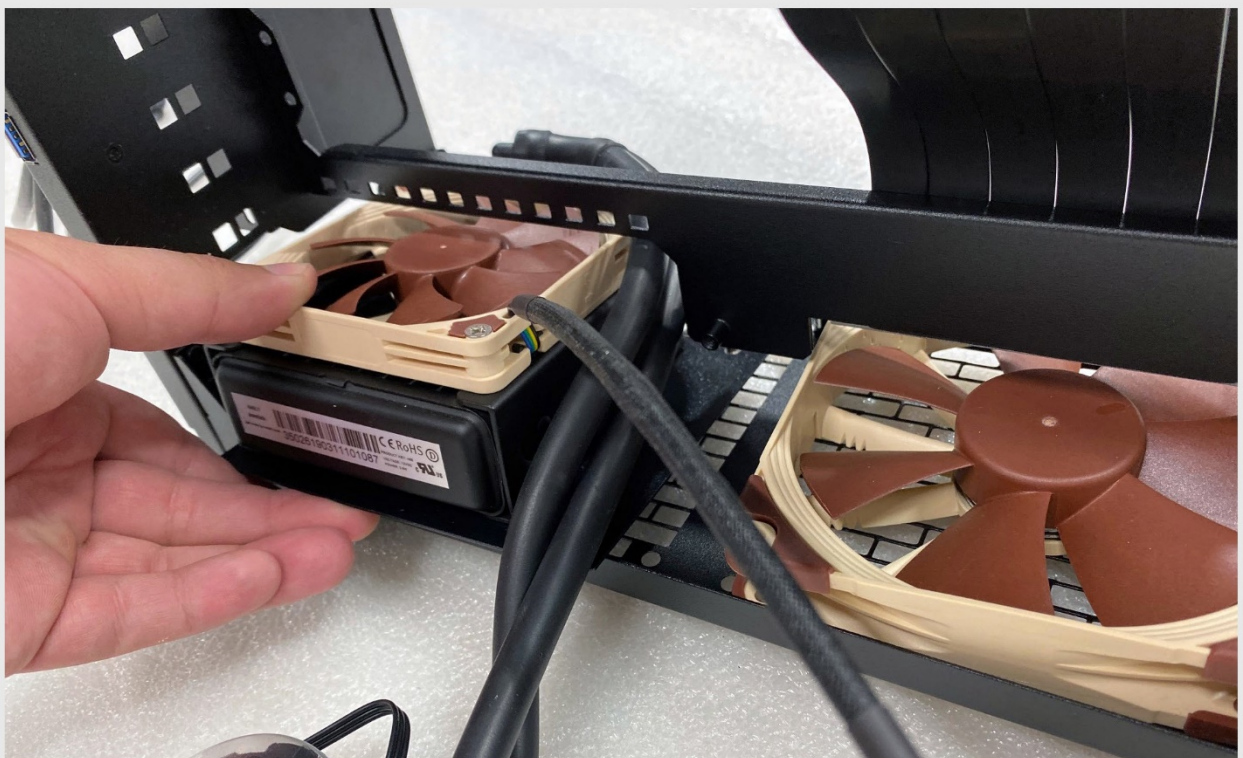

CHECK CLEARANCE

The below image illustrates where the tubes should be resting once the radiator is successfully placed. This position prevents any kinks in AIO hoses.

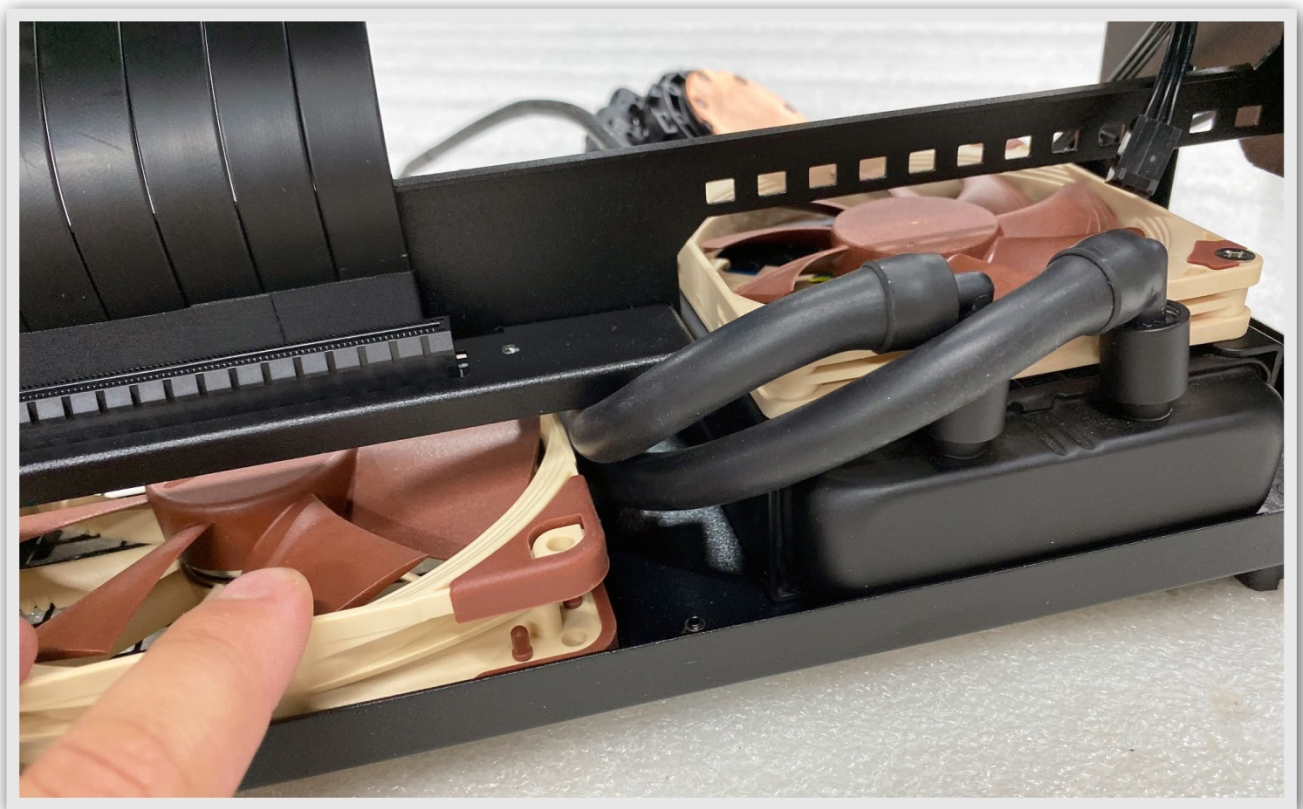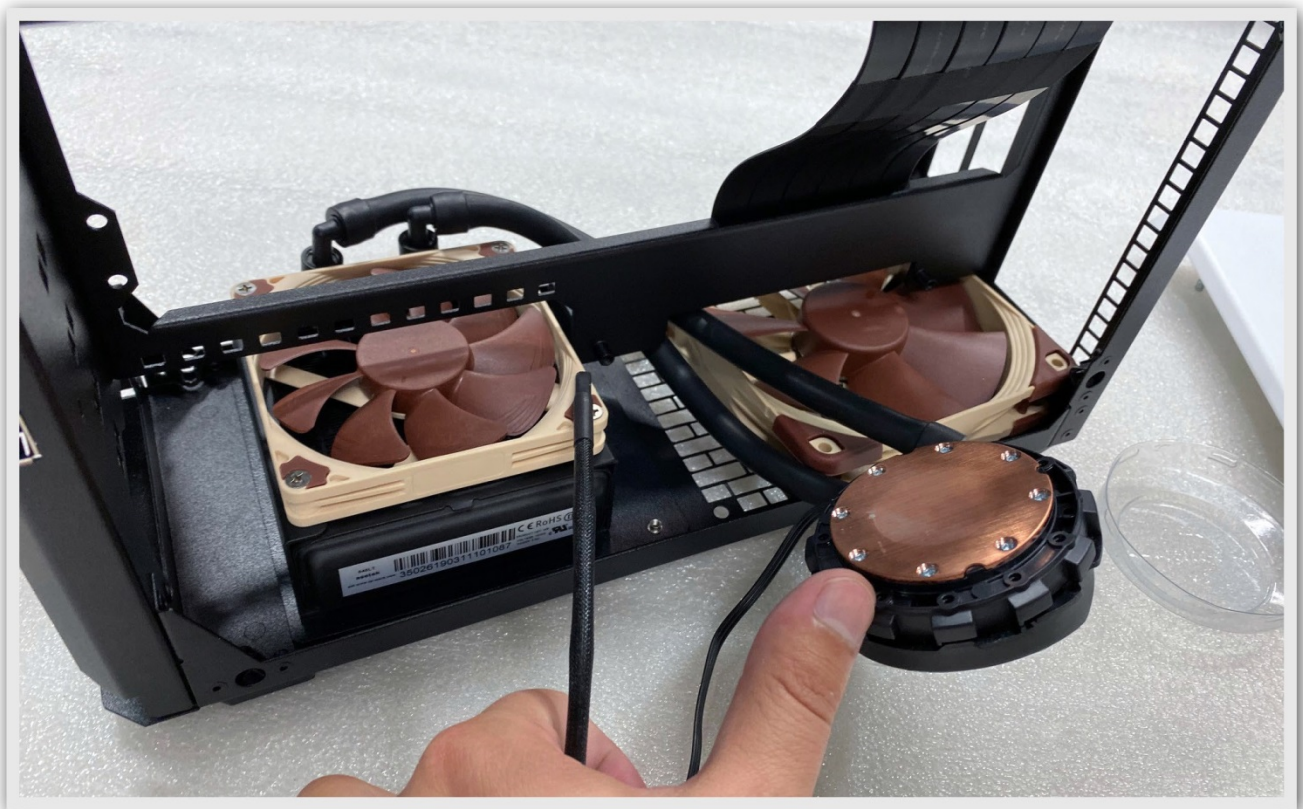

TIME TO SCREW

Install the AIO bracket with the 2x M3 flat head screws provided with the AIO bracket.
Your 120mm fan can then be screwed into position.



Info	
Manufacturer	Importer

SLIGER

Sliger Designs Inc.

1575 Linda Way, Suite 107

Sparks, NV 89431, USA

+1 775 356 5595a

www.sliger.com



DENSITY LABS s.r.o.

Veterná ulica 759/37

SK-90067 Láb, Slovakia

www.DENSITY.sk

© 2019 Density Labs s.r.o. and Sliger Designs Inc.. All rights reserved. DENSITY logo is a property of Density Labs s.r.o. in Slovakia and/or in other countries. All other trademarks are the property of their respective owners. Product may vary slightly from pictures in this document.